

Facestock

A white, machine coated, woodfree printing paper specially treated to give good resistance to grease and oil.

The facestock is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451)

Basis Weight	90 g/m ²	ISO 536
Caliper	90 µm	ISO 534

Adhesive

A special purpose permanent, acrylic based adhesive for direct food contact.

Liner

BG40 white, a supercalendered glassine paper.

The liner is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451).

Basis Weight	58 g/m ²	ISO 536
Caliper	51 µm	ISO 534

Laminate

Total Caliper	163 µm±10%	ISO 534
---------------	------------	---------

Performance Data

Initial Tack	6 N/25mm	FTM 9 Glass
Peel Adhesion 90°	4.5 N/25mm	FTM 2 St.St.
Service Temperature	-50 °C to 120 °C	

Applications and Use

Typical applications include labels for food packaging and applications where contact with oils and greases are expected.

Special care should be given during dispensing around the gum free area.

Conversion and Printing

The product can be printed by letterpress, flexo, gravure, screen and hot-foil stamping.

The special product lay-out could have an influence on conversion speed.

Compliance and Approvals

The adhesive used in this construction may be used in direct food contact applications. For complete information regarding the food contact compliance status, please contact your local sales representative for a Food Contact Statement.

The laminate is made with FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451)


Shelf Life

To obtain optimal performance, use this product within two years of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

AA665

Fasson®

GREASEPROOF FSC S2800 INC SGP-BG40WH FSC

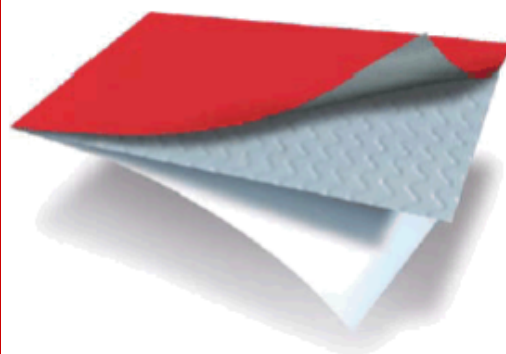

GREASEPROOF FSC

S2800 SGP

BG40WH FSC



The mark of
responsible forestry

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000



Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>

©2024 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.