

#### Facestock

Acetate Satin Cloth is a white acetate satin fabric with high opacity and lustrous finish.

Basis Weight	125 g/m <sup>2</sup>	ISO 536
Caliper	160 µm	ISO 534

#### Adhesive

A special purpose permanent, acrylic based UV hotmelt adhesive.

#### Liner

BG40 white, a supercalendered glassine paper.

The liner is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451).

Basis Weight	59 g/m <sup>2</sup>	ISO 536
Caliper	53 µm	ISO 534

#### Laminate

Total Caliper	263 µm±10%	ISO 534
---------------	------------	---------

#### Performance Data

Initial Tack	30 N/25mm	FTM 9 Glass
Peel Adhesion 90°	19 N/25mm	FTM 2 St.St.
Min. Application Temp.	5 °C	
Service Temperature	-20 °C to 120 °C	

#### Adhesive Performance

S3100 features excellent tack and adhesion to a wide variety of substrates including apolar surfaces.

#### Applications and Use

Acetate Satin Cloth material is mainly used in attractive quality labels including conference badges, promotional stickers etc.

The high coat weight adhesive featuring high tack and final peel adhesion makes this product ideal for labelling textured surfaces including cast metal parts, warehouse racking or tiles.

#### Conversion and Printing

Acetate Satin Cloth has very good printing properties for letterpress, flexo and offset processing. Apply a thin ink coating only. For letterpress use the lowest possible pressure. For screen printing a fine screen mesh is recommended.


#### Shelf Life

To obtain optimal performance, use this product within one year of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

## AH952

### Fasson®

#### ACETATE SATINCLOTH S3100-BG40WH FSC

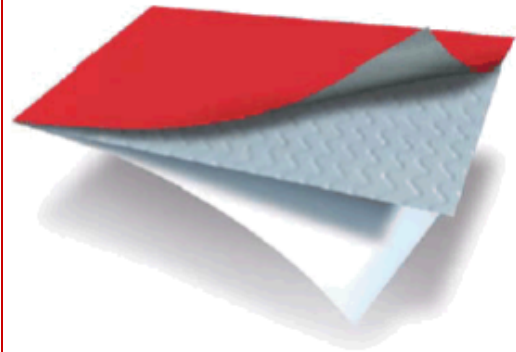

ACETATE SATINCLOTH WHITE	
-----------------------------	--

S3100	
-------	---

BG40WH FSC	
------------	---



The mark of  
responsible forestry

*This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.*

*If you would like to make a suggestion or comment on this datasheet, please send an email to [datasheet.mgmt@eu.averydennison.com](mailto:datasheet.mgmt@eu.averydennison.com)*

## Avery Dennison Materials Group Europe

Willem Einthovenstraat 11  
2342 BH Oegstgeest  
The Netherlands  
+31 (0)85 000 2000



### Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>

©2022 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.