

### Facestock

Gloss white polyester film with special void effect and top coating for conventional and TT printing.

Basis Weight	79 g/m <sup>2</sup>	ISO 536
Caliper	59 µm	ISO 534

### Adhesive

An extra permanent, acrylic based adhesive.

### Liner

BG45 white, a supercalendered glassine paper.

Basis Weight	71 g/m <sup>2</sup>	ISO 536
Caliper	61 µm	ISO 534
Transparency	50 %	DIN 53147

### Laminate

Total Caliper	137 µm±10%	ISO 534
---------------	------------	---------

### Performance Data

Initial Tack	17 N/25mm	FTM 9 Glass
Peel Adhesion 90°	10 N/25mm	FTM 2 St.St.
Min. Application Temp.	5 °C	
Service Temperature	-40 °C to 90 °C	

### Adhesive Performance

S700 is a reinforced permanent acrylic based adhesive with very good initial tack and adhesion to a wide range of substrates.

### Applications and Use

Once applied to the substrate on removal, an irreversible and dry "void" footprint message will detach itself from the face film. Labels which have been removed cannot be reapplied since repositioning will leave visible proof that tampering has taken place. On paper and cardboard, labels should not be taken away before 24h.

### Conversion and Printing

Very good conversion characteristics on flatbed and rotary presses.


### Shelf Life

To obtain optimal performance, use this product within one year of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

## AI308

## Fasson®

### FLEXSECURE WHITE S700-BG45WH

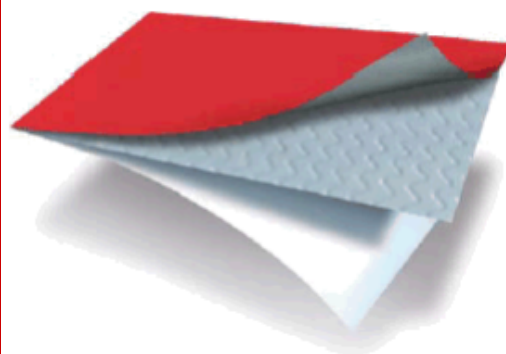

FLEXSECURE WHITE

S700

BG45WH

*This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.*

*If you would like to make a suggestion or comment on this datasheet, please send an email to [datasheet.mgmt@eu.averydennison.com](mailto:datasheet.mgmt@eu.averydennison.com)*

### Avery Dennison Materials Group Europe

Willem Einthovenstraat 11  
2342 BH Oegstgeest  
The Netherlands  
+31 (0)85 000 2000

#### Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>



©2022 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.