

Facestock

A gloss white polyester film. The smooth surface is covered with a topcoat for very good ink anchorage.

Basis Weight	76 g/m ²	ISO 536
Caliper	50 µm	ISO 534

Adhesive

A special purpose permanent, acrylic based UV hotmelt adhesive.

Liner

BG45 white FSC is a supercalendered glassine paper.

The liner is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451).

Basis Weight	72 g/m ²	ISO 536
Caliper	63 µm	ISO 534

Laminate

Total Caliper	141 µm±10%	ISO 534
---------------	------------	---------

Performance Data

Initial Tack	24 N/25mm	FTM 9 Glass
Peel Adhesion 90°	16 N/25mm	FTM 2 St.St.
Min. Application Temp.	5 °C	
Service Temperature	-20 °C to 120 °C	

Adhesive Performance

S3100 features excellent tack and adhesion to a wide variety of substrates including apolar surfaces.

Applications and Use

Transfer PET white TOP is designed for conversion into identification, warning and tracking labels for durable goods such as automotive parts, electronic devices and home appliances. This product is distinguished by the high chemical resistance of the thermal transfer print. For special requirements we strongly recommend application tests.

The high coat weight adhesive featuring high tack and final peel adhesion makes this product ideal for labelling textured surfaces including cast metal parts, warehouse racking or tiles.

Conversion and Printing

Very good results can be achieved with thermal transfer printers equipped with conventional or near-edge print heads using resin ribbons. Transfer PET white TOP can also be printed by all conventional roll label techniques, including flexo, UV letterpress, silkscreen. This material is qualified for UV inkjet printing by the following printer manufacturers: EFI Jetrion, Domino (n610i), Durst (TAU 330 RSC) and Xeikon (PX3000). Results of durability tests are available on request. For easy diecutting sharp corners should be avoided.


Compliance and Approvals

Sustainable alternative: This material is available with 70% recycled content in the face material under a *different product code*.

AL272

Fasson®

TRANSFER PET WHITE TOP S3100 INC-BG45WH FSC

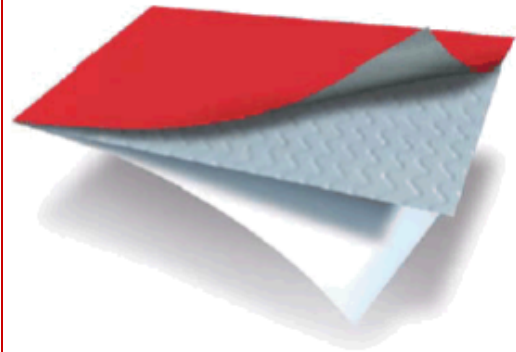

TRANSFER PET WHITE TOP

S3100

BG45WH FSC



The mark of
responsible forestry

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

The adhesive S3100 is suitable for contact with dry and moist, non-fatty foodstuffs in this construction. For complete information regarding the food contact compliance status, please contact your local sales representative for a Food Contact Statement.

Shelf Life

To obtain optimal performance, use this product within one year of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

Appendix

Performance Data

Note: the following technical data should be considered representative or typical only and should not be used for specification purposes.

Peel Adhesion:

FTM1: 180°, 300 mm/min, dwell time: 48 hours

Surface	N/25mm
ABS	32,0
Aluminium	23,0
Automotive lacquered panels	32,0
Glass	31,0
HDPE	17,0
LDPE	17,5
PA6	31,0
Stainless Steel	33,5

Chemical Resistance:

The performance results are based on 4 hours immersions at room temperature unless otherwise noted. Samples were applied to the test panel and conditioned for 24 hours before immersion and evaluated immediately upon removal. Peel adhesion was measured according to FTM1.

Chemical	Test Substrate	N/25mm	Visual appearance	Edge Penetration
Brake Fluid	Glass	9,6	No change	0 mm
Diesel	Glass	8,8	No change	0 mm
Engine Oil	Glass	9,2	No change	0 mm
Gasoline	Glass	7,3	No change	3 mm
Heptane	Glass	7,0	No change	3 mm
Water, distilled	Aluminium	8,0	No change	3 mm

Chemicals:

Brake Fluid: DOT 4 Synthetic (One Way), Diesel: TOTAL,
Engine Oil: TOTAL quartz 700, 10 W 40, Gasoline: TOTAL Euro 95

Appendix

Thermal Transfer Printing:

Printability – Physical Resistance

Flat head printers (tests were performed with the printer Zebra XII 140):

Ribbon	Settings speed energy		Print Quality	ANSI Grade	Scratch resistance	Tape resistance
Armor AXR7+	3	20	++	A	++	++
Armor AXR8	3	15	++	A	++	++
DNP R300	3	15	++	A	++	++
DNP R510	3	20	++	A	++	++
limak SP330	3	15	++	A	++	++
ITW B324	3	15	++	A	++	++
Ricoh B110CR	3	15	++	A	++	++

Near edge printers (tests were performed with the printer Avery TTX 450 – Near Edge):

Ribbon	Settings	Print Quality	ANSI Grade	Scratch resistance	Tape resistance
Armor AXR 600	4 "/s	+	A	++	o
Armor AXR 800	4 "/s	+	B	++	o
Ricoh B120 E	4 "/s	++	A	+	+

ANSI (American National Standards Institute) Grade: information about barcode quality

A: excellent B: good C: acceptable D: readable with difficulty

++: excellent +: good o: acceptable -: poor

Chemical Resistance

The printed samples were wetted on the surface with a soft clean cotton cloth soaked in the test solution by wiping 10 times back and forth with light pressure. After 5 seconds they were dried with a clean dry soft cloth. After 15 minutes the evaluation took place.

	AXR7+	AXR8	R300	R510	SP330	B324	B110 CR	AXR 600	AXR 800	B120 E
Ad Blue	+	+	+	+	+	+	+	+	+	+
Anti-Freeze	+	+	+	+	+	+	+	+	+	+
Biodiesel	+	o	+	+	+	+	+	-	o	-
Bioethanol E85	-	+	+	+	+	+	+	-	o	-
Brake fluid	-	+	+	+	o	+	+	-	o	-
Cleaner solvent	+	+	+	+	+	+	+	-	-	-
Engine oil	+	+	+	+	+	+	+	+	+	o
Gasoline	-	o	-	+	-	-	-	-	-	-
Hard wax polish	+	+	+	+	+	+	+	-	-	-
Isopropanol	+	+	+	+	+	+	+	-	o	-
Spirit	-	+	+	+	+	+	+	-	o	-

+: good (no change) o: acceptable (minor change, still readable) -: poor

Chemicals:

Ad Blue: Aral, Anti-Freeze: Speedfrost "Speedfroil" 1:1 in water, Bioethanol E85: CropEnergies CropPower85

Brake Fluid: DOT 4 Synthetic (One Way), Cleaner Solvent: "Caramba" Cold Cleaner, Engine Oil: TOTAL quartz 700, 10 W 40

Gasoline: TOTAL Euro 95, Hard Wax Polish: „Nigrin“ Hard Wax Polish

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000

Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>



©2025 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.